




Providing complete avionics installation provisions  
and support for the Aviation industry since 1984.

# 6 Conductor Composite Cable

**P/N 332606**

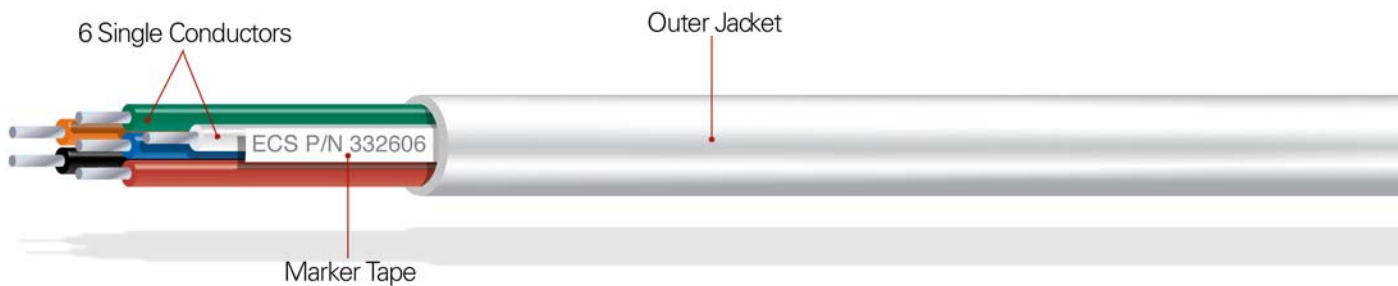

## **6 Single Conductors**

**Conductors:** 26 AWG stranded tin plated copper  
**Insulation:** High temperature fluoropolymer

## **Overall Cable:**

**Outer Jacket:** White high temperature fluoropolymer  
(laser markable)

## **Physical Characteristics**

**Outer Diameter:** 0.146 inches nominal  
**Bend Radius:** 0.8 inches  
**Weight:** 1.5 lbs/100 ft  
**Temperature Range:** -55° to +150° C  
**Skydrol Resistant:** Yes

## **Applications**

General Purpose

## **Color Code:**

White, Black, Blue, Orange, Red, Green

## **Environmental:**

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

**Cage Code:** 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive  
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473  
sales@ecsdirect.com • www.ecsdirect.com

