




"Providing complete avionics installation provisions and support for the Aerospace industry since 1984."



Cockpit Voice Recorder Cable

P/N 362226

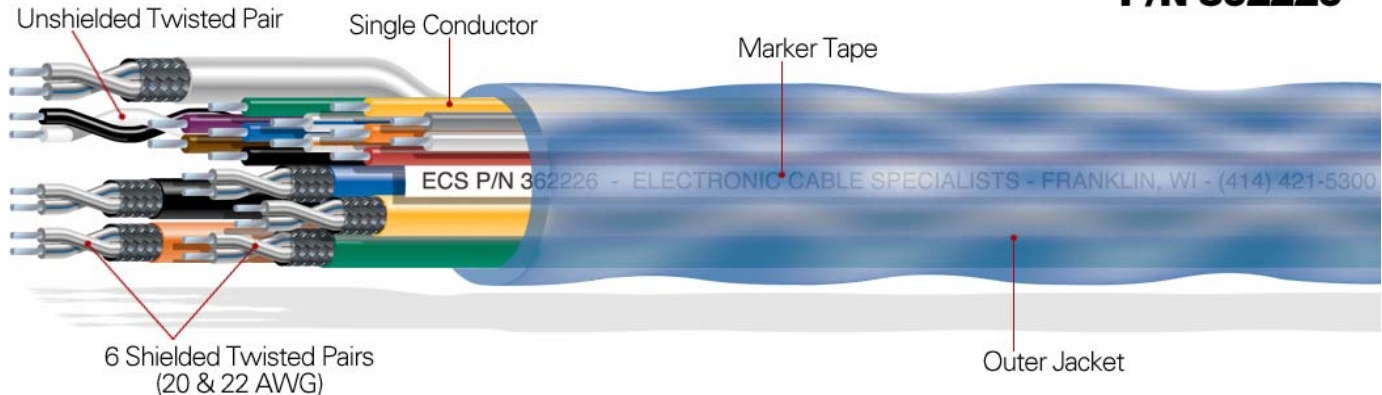

26 Conductors

1 Shielded Twisted Pair:

Conductors: 18 AWG tin coated copper
Insulation: High temperature fluoropolymer
Shield: 36 AWG tin coated copper braid
Jacket: High temperature fluoropolymer

5 Shielded Twisted Pairs:

Conductors: 22 AWG tin coated copper
Insulation: High temperature fluoropolymer
Shield: Tin coated copper braid
Jacket: High temperature fluoropolymer

2 Twisted Single Conductors:

Conductors: 20 AWG tin coated copper
Insulation: High temperature fluoropolymer
Lay: 6 twists/foot nominal

12 Single Conductors:

Conductors: 22 AWG tin coated copper
Insulation: High temperature fluoropolymer

Overall Cable:

Outer Jacket: Blue high temperature fluoropolymer (laser markable)

Physical Characteristics

Outer Diameter: 0.495 inches nominal
Bend Radius: 2.50 inches
Weight: 1.87 lbs/100 ft
Temperature Range: -55° to +150° C
Skydrol Resistant: Yes

Applications

Cockpit voice recorder

Color Code:

18 AWG Shielded Twisted Pair:
Insulation: White/Blue, White
Jacket: White

22 AWG Shielded Twisted Pairs:
Insulation: White, White/Blue
Jackets: Black, Orange, Yellow, Green, Blue

20 AWG Single Conductors: Black, White
22 AWG Single Conductors: Black, Brown, Orange, Yellow, Green, Blue, Violet, Gray, Red, White, White/Orange, White/Blue

Environmental:

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Cage Code: 66197 • **Issue Date:** 5/1/07

5300 W. Franklin Drive
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
sales@ecsdirect.com • www.ecsdirect.com

