




Providing complete avionics installation provisions  
and support for the Aviation industry since 1984.

# In-Flight Phone Cable

**P/N 362804**

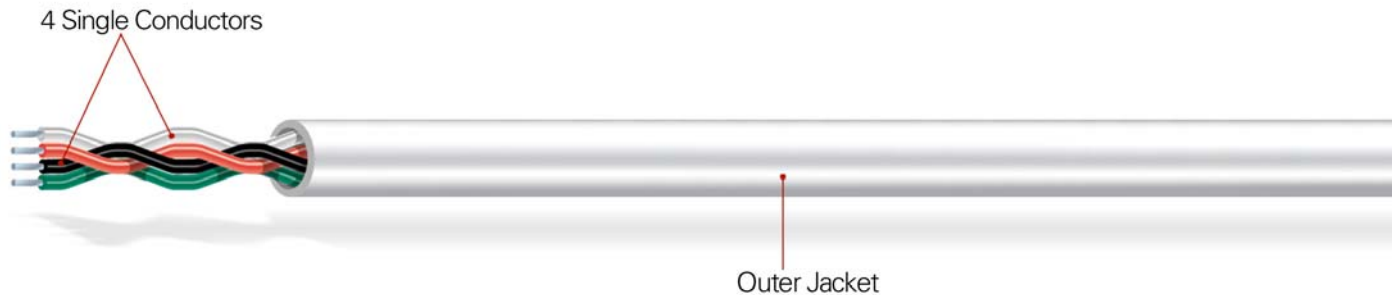

## **4 Single Twisted Conductors**

**Conductors:** 28 AWG stranded tin plated copper  
**Insulation:** High temperature fluoropolymer

## **Overall Cable:**

**Outer Jacket:** White high temperature fluoropolymer  
(laser markable)

## **Physical Characteristics**

**Outer Diameter:** 0.07 inches nominal

**Bend Radius:** 0.53 inches

**Weight:** 0.48 lbs/100 ft

**Temperature Range:** -65° to +150° C

**Skydrol Resistant:** Yes

## **Applications**

Retractable In-Flight Phone

## **Color Code:**

White, Black, Red, Green

## **Environmental:**

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

**Cage Code:** 66197 • **Issue Date:** 9/21/09

5300 W. Franklin Drive  
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473  
sales@ecsdirect.com • www.ecsdirect.com

