




"Providing complete avionics installation provisions and support for the Aerospace industry since 1984."



ARINC 429 Data Bus Cable

P/N 422402

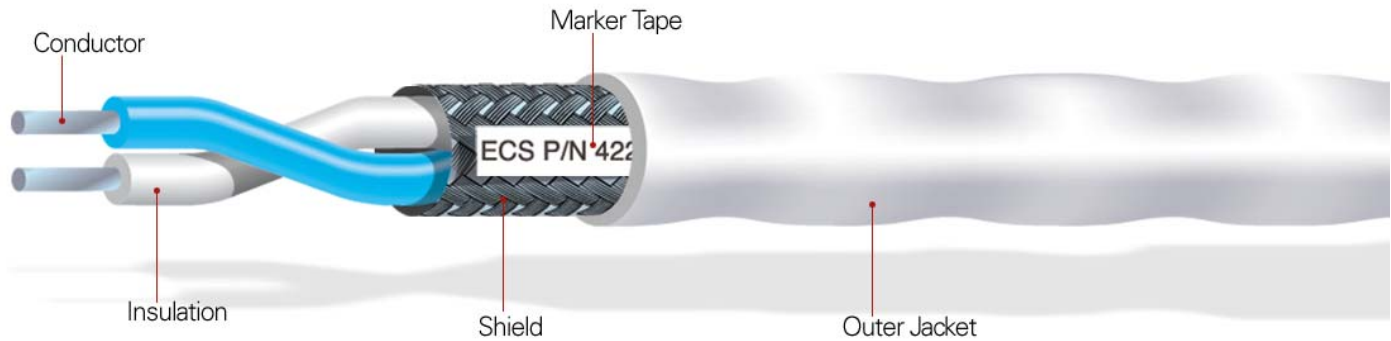

2 Conductors: 24 AWG stranded tin plated copper
Insulation: High temperature fluoropolymer
Color Code: Light blue, white
Shield: Tin plated copper braid
Jacket: White high temperature fluoropolymer (laser markable)

Physical Characteristics

Outer Diameter: 0.15 inches nominal
Bend Radius: 0.75 inches nominal
Weight: 1.35 lbs/100 feet nominal
Temperature Range: -55° to +200° C
Skydrol Resistant: Yes

Electrical Characteristics

Impedance: 70 Ohms nominal
Capacitance: 24.5 pF/ft maximum
Velocity of Propagation: 70% nominal
Attenuation: 1 MHz 1.40 dB/100 ft nominal

Applications

ARINC 429

Environmental:

- ECS data bus cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Cage Code: 66197 • **Issue Date:** 5/1/07

5300 W. Franklin Drive
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
sales@ecsdirect.com • www.ecsdirect.com

