




"Providing complete avionics installation provisions and support for the Aerospace industry since 1984."



IFE Seat Cable

P/N 362207

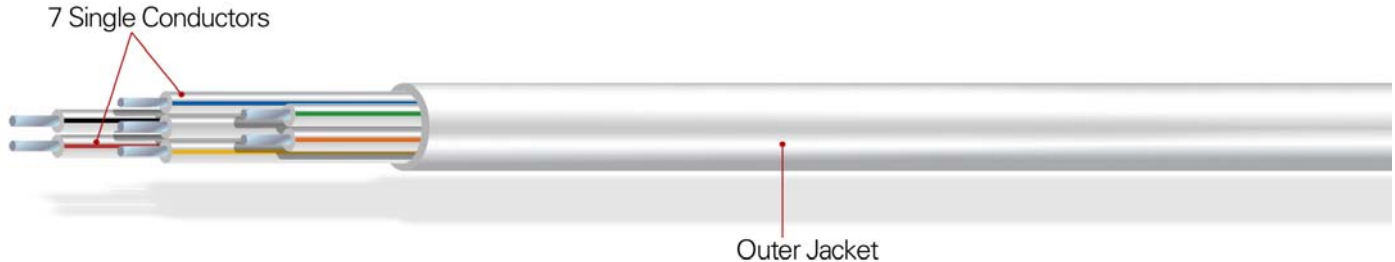

7 Single Conductors

Conductors: 22 AWG stranded tin plated copper
Insulation: High temperature flouropolymer

Overall Cable:

Outer Jacket: White high temperature flouropolymer (laser markable)

Physical Characteristics

Outer Diameter: 0.151 inches nominal
Bend Radius: 0.8 inches
Weight: 2.5 lbs/100 ft
Temperature Range: -55° to +150° C
Skydrol Resistant: Yes

Applications

IFE Seat Cable

Color Code:

White, White/Black, White/Blue, White/Orange, White/Red, White/Green, White/Yellow

Environmental:

- ECS Composite cables are designed to meet, or exceed, burn requirements as set forth in Federal Aviation Regulations 14 CFR Part 25.869(a)(4) Amdt 25-113, Appendix F Part I(a)(3).
- They are manufactured with materials which, when subjected to flames or high temperatures, will not outgas deadly hydrogen chloride produced by conventional PVC cables.

Cage Code: 66197 • **Issue Date:** 5/1/07

5300 W. Franklin Drive
Franklin, Wisconsin 53132 USA

414.421.5300 • 800.327.9473
sales@ecsdirect.com • www.ecsdirect.com

